



# BTW

## Weighing Indicator


**E** Economic Solution

## FEATURE

- The interface is simple and easy to operate
- Up to 1/15,000 display resolution
- High Speed 24bits AD; Display reading speed faster
- AC / DC switching function (Built-in rechargeable battery)
- LCD display (Weight-6 digits); Full range tare; Auto zero tracking
- Low power indication
- Simple counting; Hold function; Accumulating function
- Check mode Lo / Hi / OK
- LED Lo / Hi / OK indication
- Selectable units: Kilogram (kg) and pound (lb)

## OPTION

- RS232: Easily transmitting data to PC or printing
- Sleeve connecting stand

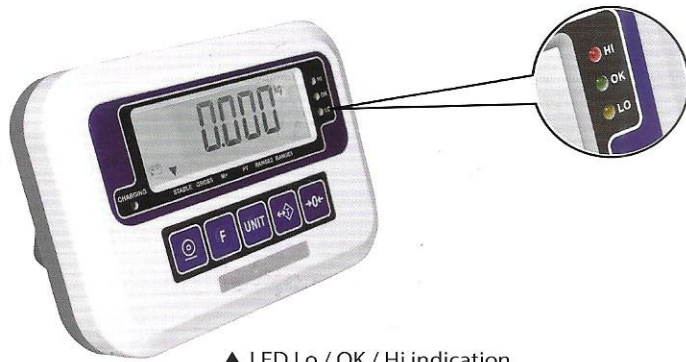

## SPECIFICATION

- Operating Temperature: 0°C ~ 40°C (32°F ~ 104°F)
- Power Source: AC 110V/220V (±10%) + DC 6V / 4Ah rechargeable battery
- Display LCD 6 digits, Height 25mm, LED Backlight
- Indicator Dimensions: 235 x 165 x 127 mm (W x H x D)

# BTW

## Weighing Indicator

 Economic Solution



▲ Can be connected to most types of platforms

